

Abstract of Korean Patent Publication No. 1986-4189 A

韓国公開特許公報第1986-4189号の英文抄録

Perfumed textile fabric was prepd. by permeating them with the coating agent contg. perfume. Thus, 1-10% perfume soln. contg. heat-resisting perfume 10, synthetic resin soln. 40, toluene 30, and M.E.K. 20 wt.% was mixed with 100% coating soln. contg. polyurethane, silicone, acrylic, rubber, water binder, and fluoric resin to give coating agent. The coating agent was permeated into the textile fabric by a sprayer or digester. The coated textile was dried and rolled to give perfumed textile fabric.

특 1986-0004189

(19) 대한민국특허청(KR)
(12) 공개특허공보(A)

(51) Int. Cl.
D06B 5/08

(11) 공개번호 특 1986-0004189
(43) 공개일자 1986년 06월 18일

(21) 출원번호	특 1984-0007369
(22) 출원일자	1984년 11월 22일
(71) 출원인	손상
	서울시 은평구 대조동 216-11
	마락영
	경북 김천시 모암동 106번지
(72) 발명자	손상
	서울시 은평구 대조동 216-11
	마락영
	경북 김천시 모암동 106번지
(74) 대리인	최인술


심사청구 : 있음

(54) 직물류에 대한 향료의 침투접착방법

요약

내용 없음

도면

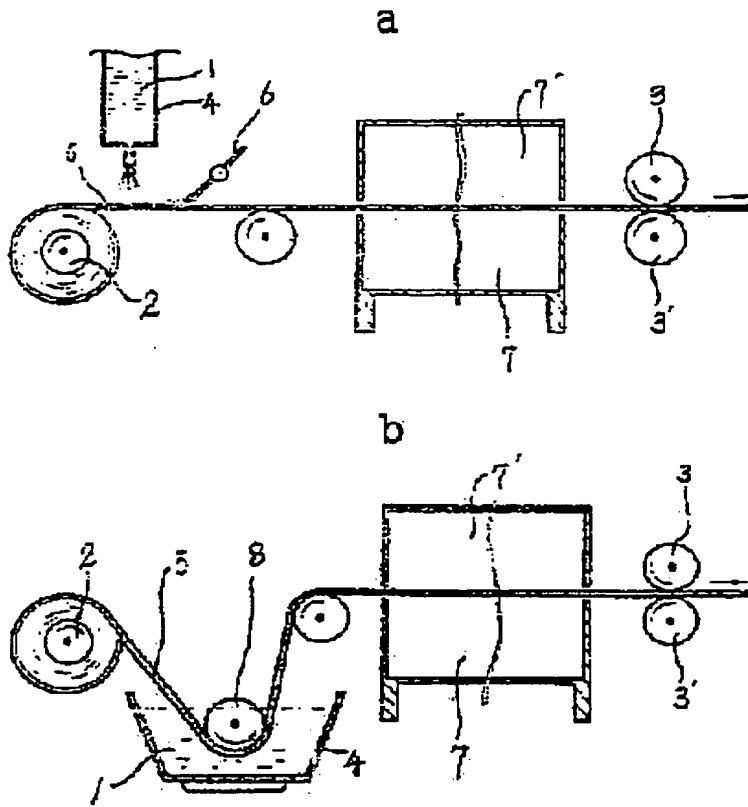

명세서

[발명의 명칭]

직물류에 대한 향료의 침투접착방법

[도면의 간단한 설명]

본 발명의 실시예도이다.

본 내용은 요부공개 건이므로 전문내용을 수록하지 않았음

(57) 청구의 범위


청구항 1

고열향료 10%, 합성수지액 40%, 희석용액(토루엔이나 M.E.K) 20-30%, 중량비를 교반통에 넣어 고속회전시켜서 향료액을 조성하는 제1공정, 폴리우레탄 수지, 실리콘, 고무액, 수성바인더, 불소수지 등으로 되는 코팅액을 조성하는 제2공정, 상기 포팅액 100%에 상기 향료액 1-10%를 혼합하여 코팅 향료액을 조성하는 제3공정, 코팅 향료액을 탱크(4)에 넣어서 직물 원단(5)에 고무 분사하거나 로울러(8) 아래로 통과시켜 직물 조직에 침투시키는 제4공정, 이를 건조장치(7)(7')에서 향료를 접착 건조시킨 다음 인출로울러(3)(3')로 인출되게 하는 제5공정의 결합을 특징으로 하는 직물류에 대한 향료의 침투접착방법.

※ 참고사항 : 최초출원 내용에 의하여 공개하는 것임.

도면

도면 1a

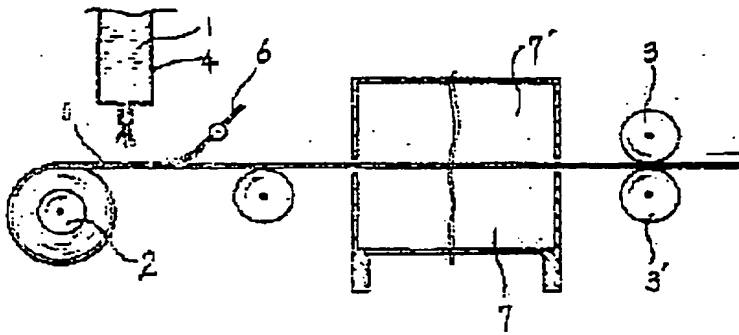

도면 1b

